

MODYPOLY POLYSIX CHEAT SHEET

ARP HOLD CHORD MEMORY UNISON POLY



PLAY MODES

2 VOICE



3 VOICE



POLYCHORD



POWERARP



LONG PRESS

RETRIGGER



RETRIGGER




RETRIGGER OFF

CLOCK DIVIDER

Key	1	2	3	4	5	6	7	8
Bars	2.5	2	1.5	1	$\frac{3}{4}$	1T	$\frac{1}{2}$	$\frac{3}{8}$
Key	9	10	11	12	13	14	15	16
Bars	$\frac{1}{2}T$	$\frac{1}{4}$	$\frac{3}{16}$	$\frac{1}{4}T$	$\frac{1}{8}$	$\frac{1}{8}T$	$\frac{1}{16}$	$\frac{1}{32}$

PROGRAM MODE - HOLD [HOLD] UNTIL BLINKING

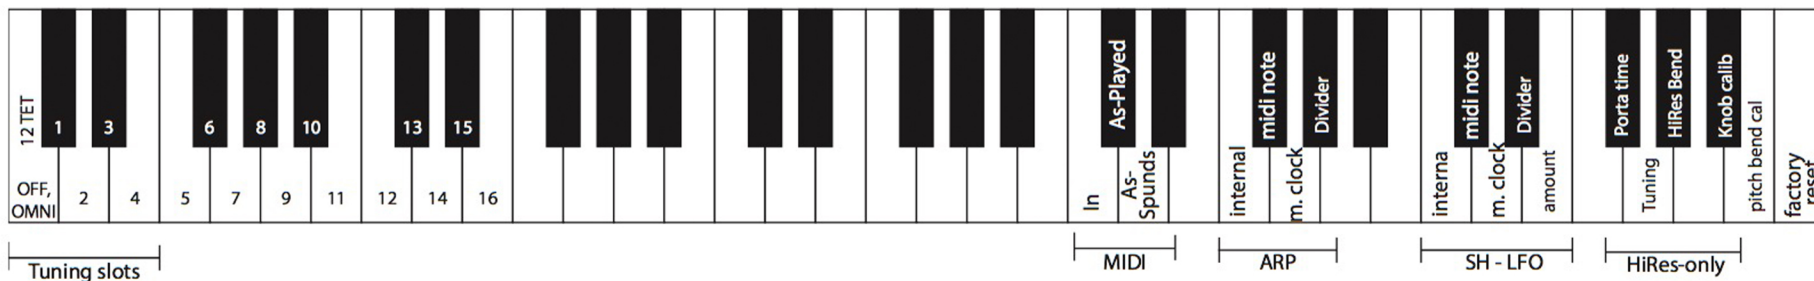

MIDI CONTROLLER NUMBERS

Controller number	Usage	Range
16	Arp clock divider	* see table 1
17	Filter cutoff	0-127
18	S/H LFO amount	0-127
19	S/H LFO divider	0-127 *see table 1
21	CV2 (if installed)	0-127
22	CV3 (if installed)	0-127
23	Triangular lfo frequency coarse	0-127
24	Triangular lfo frequency fine	0-127
25	Triangular lfo amount	0-127
26	Portamento time	0-127
27	Detuning / Voice spread amount	0-127
64	Sustain	off:0-63,on:64-127
120	All Sound Off	-
123	All Notes Off	-

PROGRAM CHANGES (VOICE MODE)

Program number	Play Mode				
0	6 Voice Polyphonic				
1	Unison				
2	2 Voice Polyphonic				
3	3 Voice Polyphonic				
4	Chord Memory				
5	Polychord				
6	Unison / Share				
7	4 Voice Polyphonic				
8	3 Voice Polyphonic (Mono/poly)				
9	Random 4 Voice Polyphonic				