


ROLAND SYSTEM-500 MODULE 531

MIXER

The SYS-531 has six high-quality inputs, each with level slider, pan knob, and mute button. A central hub for mixing mono or stereo (PRE only) signals. The six pan knobs are CV controlled for interesting stereo effects. Stereo preamp for mic or line level signals. The headphone section, dedicated volume knob, output section for both 1/4" and 1/8" cables. LED level indicator.

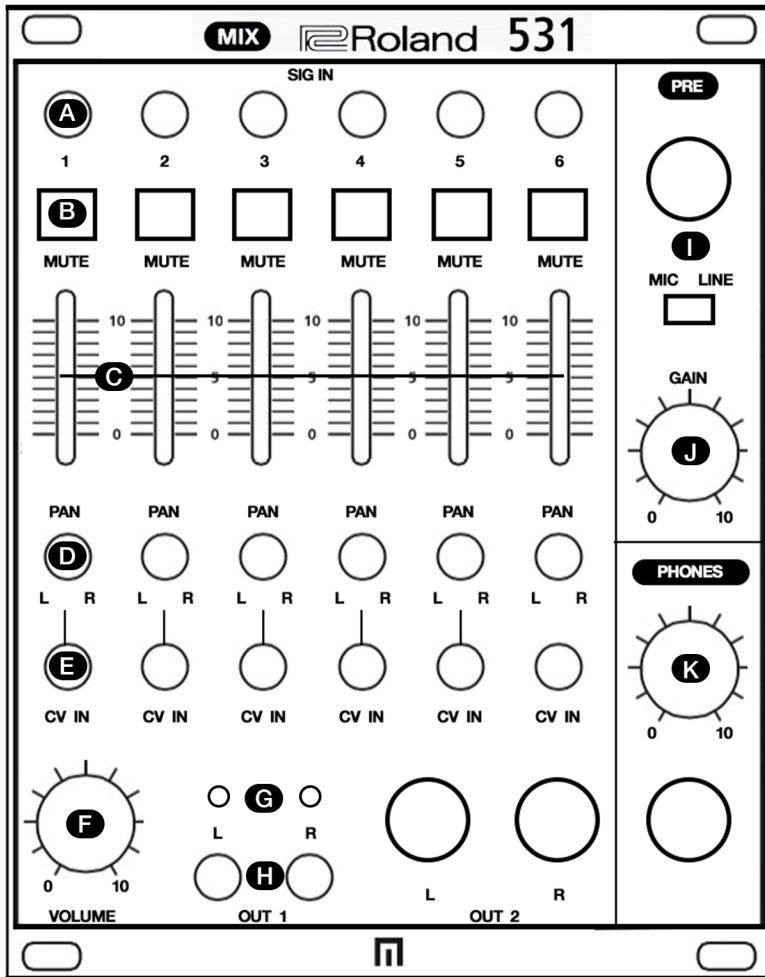

- A** SIG IN 1-6
These jacks input the audio signals that will be mixed.
- B** MUTE SW 1-6
These switches mute (silence) each input.
- C** LEVEL CONTROL 1-6
These sliders adjust the level of the signals that are input from the SIG IN jacks.
- D** PAN 1-6
These knobs adjust the left/right proportion of volume.
- E** CV IN 1-6
Input voltage to these jacks to control pan from external source.
- F** VOLUME
This knob adjusts the volume that is output from OUT1 and OUT2.
- G** INDICATORS
These indicate the status of the output signal (unlit when loaded, lit when overloaded).
- H** OUT 1 - OUT 2
These are output jacks. The same signal is output from OUT1 and OUT2.
- I** PRE SIG IN MODE SWITCH
Connect a mic or line-level device here. If MIC mode is selected, the input signal is output to CH6. If LINE mode is selected, the L signal is output to CH5 and the R signal is output to CH6. If plugs are inserted into SIG IN 5 and 6, the signals of SIG IN 5 and 6 take priority.
- J** PRE GAIN
This knob adjusts the level of the signal that is input from the PRE SIG IN jack.
- K** PHONES OUT/VOLUME
You can connect headphones here and monitor the mixed signal. The knob adjusts the monitor volume.

SPECIFICATIONS

CONTROLLERS

MUTE SWITCH (1-6)
SIGNAL IN SLIDER (1-6)
PAN KNOB (1-6)
VOLUME KNOB
MIC LINE SWITCH
GAIN KNOB
PHONES KNOB

INDICATORS

OVERLOAD INDICATOR L
OVERLOAD INDICATOR R

CONNECTORS

SIGNAL IN JACK 1-6
CV IN JACK 1-6
OUTPUT 1 JACK L-R

OUTPUT 2 JACK L-R
PRE IN JACK
PHONES JACK

POWER SUPPLY

EURORACK POWER

CURRENT DRAW

195 MA (+12 V)
165 MA (-12 V)

ACCESSORIES

OWNER'S MANUAL
LEAFLET "USING THE UNIT SAFELY"
EURORACK INSTALLATION SCREWS
EURORACK POWER CABLE)